


# SCHINDLER 9300<sup>®</sup> ADVANCED EDITION



**Type 10  
30°-J**

**Rise:** max. 6 m at a step width of 1000 mm  
**Balustrade:** design E  
**Balustrade height:** 900/1000 mm  
**Inclination:** 30°  
**Step width:** 600/800/1000 mm  
**Step run:** top 715 mm  
 bottom 560 mm

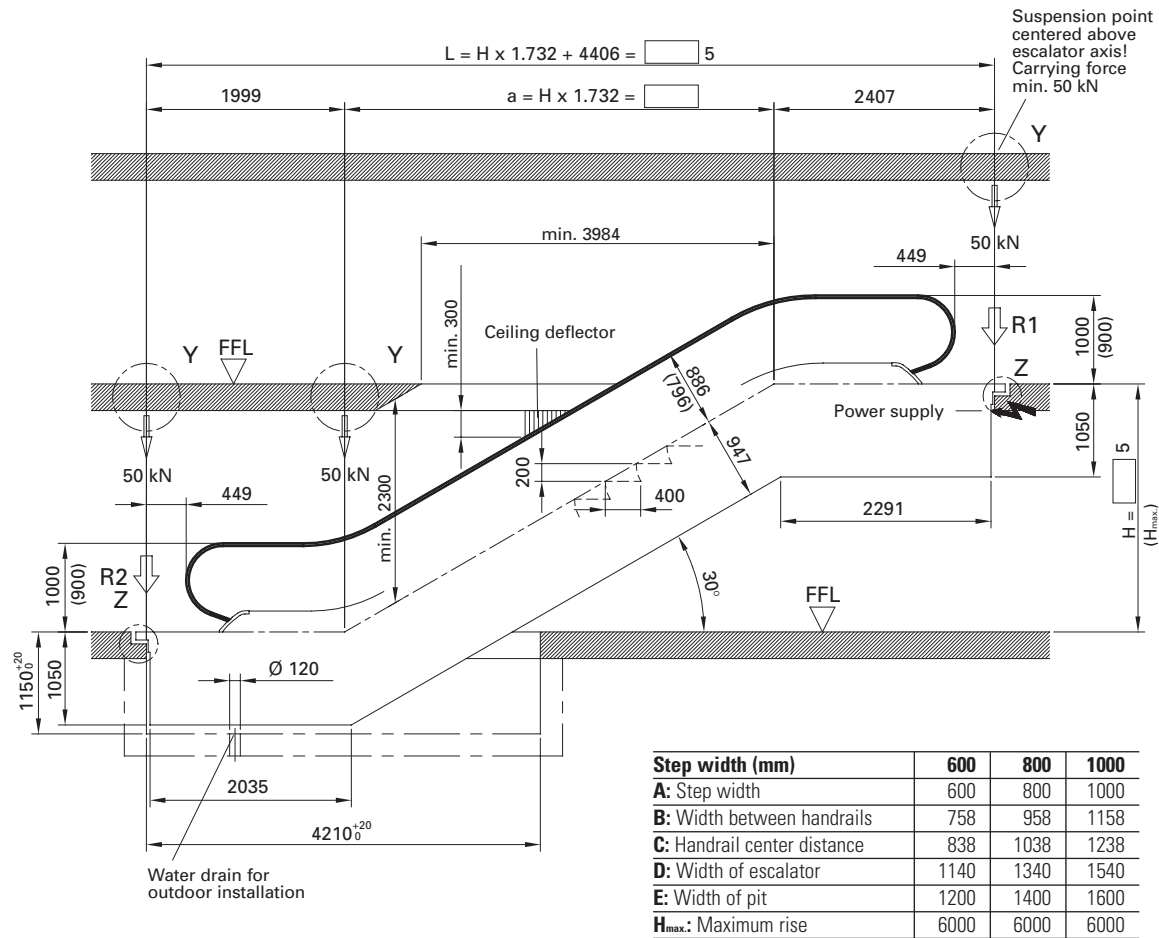


**Schindler**

## Transportation dimensions

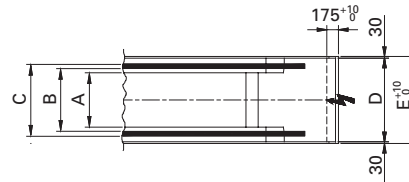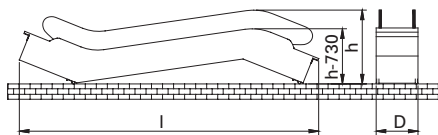

## Detail Z

Gaps at joints to be filled with joint filler (by customer)



Inlet for lighting and power circuits centered at upper end, through front face

Step width A mm	Rise H mm	Weight kN	Support loads		P mot kW	Transp. dimensions Balustrade height 1000	
			R1 kN	R2 kN		h	l
600	3000	55	39	32	4	2790	10540
	3500	58	41	34	4	2810	11530
	4000	62	44	36	4	2830	12520
	4500	65	46	39	4	2850	13520
	5000	69	49	41	4	2860	14510
	5500	71	51	43	5.5	2870	15510
800	6000	76	54	46	5.5	2880	16500
	3000	58	43	36	4	2790	10540
	3500	62	46	39	4	2810	11530
	4000	66	49	41	4	2830	12520
	4500	70	52	44	5.5	2850	13520
	5000	73	54	47	5.5	2860	14510
1000	5500	76	57	49	5.5	2870	15510
	6000	84	62	54	5.5	2880	16500
	3000	61	47	40	4	2790	10540
	3500	66	51	43	5.5	2810	11530
	4000	69	54	46	5.5	2830	12520
	4500	73	57	49	5.5	2850	13520
	5000	77	60	52	5.5	2860	14510
	5500	84	65	57	7.5	2870	15510
	6000	88	68	60	7.5	2880	16500

All dimensions in mm.  
Observe national regulations!  
Subject to changes.