

# Schindler 9300 Advanced Edition


## Type 20 • 27,3°-M

**Rise:** max. 13 m at a step width of 1000 mm  
**Balustrade:** design E/F  
**Balustrade height:** 900/1000 mm

**Inclination:** 27.3°  
**Step width:** 600/800/1000 mm  
**Step run:** 3 horizontal steps



All dimensions in mm.  
 Observe national regulations!  
 Subject to changes.

- 1) If  $L > L_{max.}$ , an intermediate support may be required. Please consult Schindler.
- 2) With a double drive, the truss must be extended by 417 mm.
- 3) With a balustrade height of 900 mm,  $h$  is reduced by 70 mm.

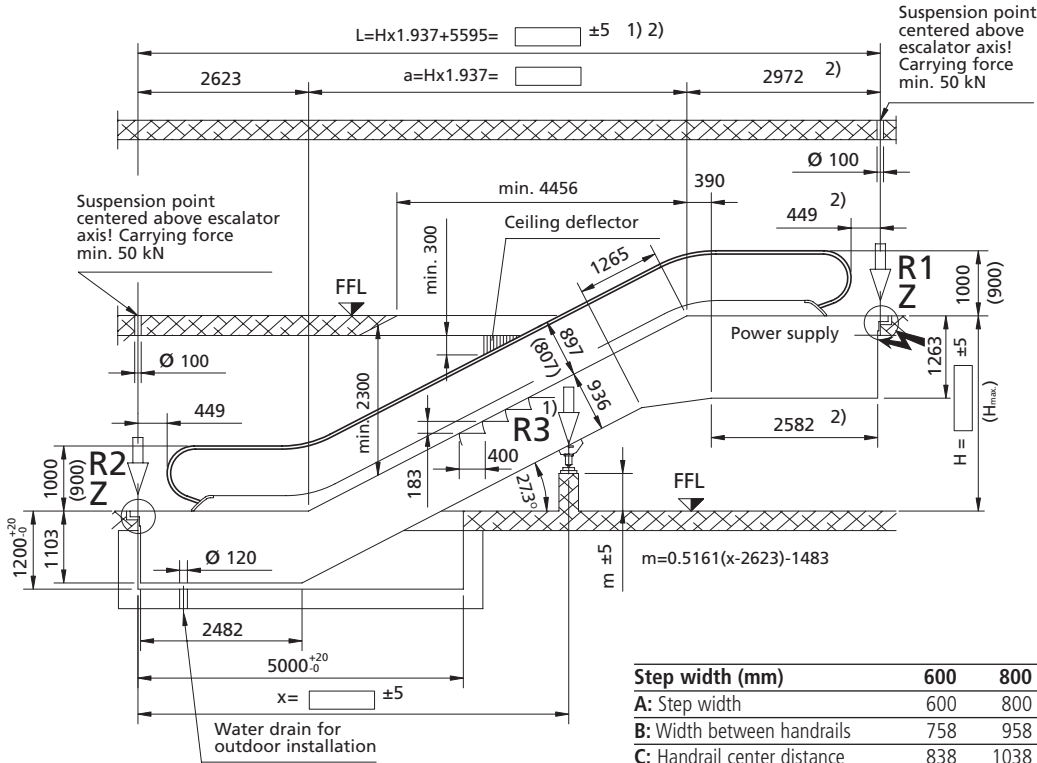


Step width (mm)	600	800	1000
A: Step width	600	800	1000
B: Width between handrails	758	958	1158
C: Handrail center distance	838	1038	1238
D: Width of escalator	1140	1340	1540
E: Width of pit	1200	1400	1600
$L_{max.}^{1)}$ : Limiting span length	19100	17200	15800
$H_{max.}$ : Maximum rise	13000	13000	13000

### Transportation dimensions

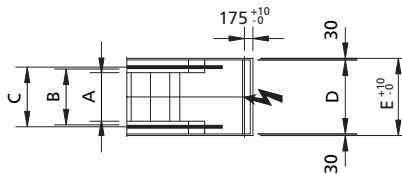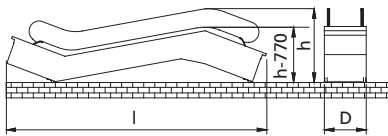

### Detail Z

Gaps at joints to be filled with joint filler (by customer)



Inlet for lighting and power circuits centered at upper end, through front face

Step width A mm	Rise H mm	Weight kN	Support loads		Transp. dimensions	
			R1 kN	R2 kN	Balustrade height 1000 $h^{3)}$	l
600	3500	70	58	49	3110	13340
	4000	74	61	52	3140	14430
	4500	77	65	56	3170	15510
	5000	81	68	59	3190	16590
	5500	89	73	64	3210	17680
	6000	93	77	68	3220	18770
800	3500	96	80	71	3230	19850
	4000	74	66	57	3110	13340
	4500	78	70	61	3140	14430
	5000	85	76	67	3170	15510
	5500	89	80	71	3190	16590
	6000	94	84	75	3210	17680
1000	3500	98	47 <sup>1)</sup>	38 <sup>1)</sup>	3230	19850
	4000	78	75	65	3110	13340
	4500	85	81	71	3140	14430
	5000	90	85	76	3170	15510
	5500	94	90	81	3190	16590
	6000	95	49 <sup>1)</sup>	40 <sup>1)</sup>	3210	17680
	6000	99	50 <sup>1)</sup>	41 <sup>1)</sup>	3220	18770
	6500	104	51 <sup>1)</sup>	42 <sup>1)</sup>	3230	19850



**Schindler**