


Schindler 9300 Advanced Edition

Type 20 • 30°-K

Rise: max. 13 m at a step width of 1000 mm
Balustrade: design E/F
Balustrade height: 900/1000 mm

Inclination: 30°
Step width: 600/800/1000 mm
Step run: 2 horizontal steps



All dimensions in mm.
 Observe national regulations!
 Subject to changes.

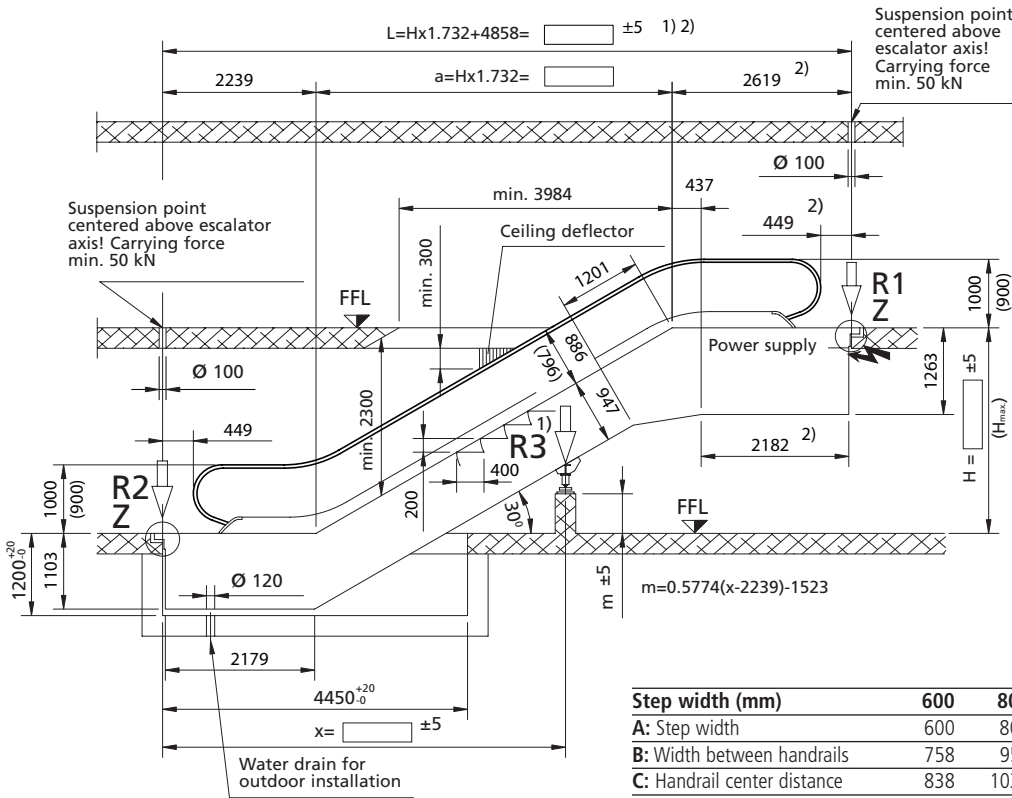

- 1) If $L > L_{max.}$, an intermediate support may be required. Please consult Schindler.
- 2) With a double drive, the truss must be extended by 417 mm.
- 3) With a balustrade height of 900 mm, h is reduced by 70 mm.


Step width (mm)	600	800	1000
A: Step width	600	800	1000
B: Width between handrails	758	958	1158
C: Handrail center distance	838	1038	1238
D: Width of escalator	1140	1340	1540
E: Width of pit	1200	1400	1600
$L_{max.}^{1)}$: Limiting span length	18800	17100	15700
$H_{max.}$: Maximum rise	13000	13000	13000

Transportation dimensions

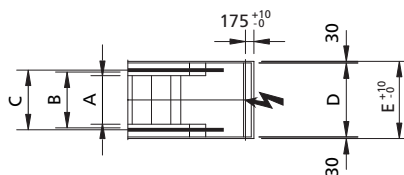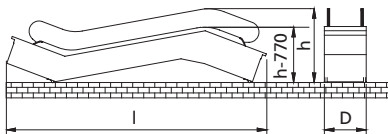

Detail Z

Gaps at joints to be filled with joint filler (by customer)



Entire support surface smooth and level

Inlet for lighting and power circuits centered at upper end, through front face

Step width A mm	Rise H mm	Weight kN	Support loads		Transp. dimensions Balustrade height 1000	
			R1 kN	R2 kN	h^3	l
600	3500	63	53	43	3060	11990
	4000	67	56	46	3090	12980
	4500	70	59	49	3110	13970
	5000	73	62	52	3120	14970
	5500	77	65	55	3140	15960
800	6000	80	68	58	3150	16960
	3500	67	60	51	3060	11990
	4000	70	63	54	3090	12980
	4500	74	67	58	3110	13970
	5000	78	71	61	3120	14970
1000	5500	85	76	66	3140	15960
	6000	89	80	70	3150	16960
	3500	71	67	58	3060	11990
	4000	74	71	62	3090	12980
	4500	78	76	66	3110	13970
	5000	85	81	72	3120	14970
	5500	90	86	76	3140	15960
	6000	94	90	80	3150	16960



Schindler