


Schindler 9300 Advanced Edition

Type 20 • 30°-M

Rise: max. 13 m at a step width of 1000 mm
Balustrade: design E/F
Balustrade height: 900/1000 mm

Inclination: 30°
Step width: 600/800/1000 mm
Step run: 3 horizontal steps



All dimensions in mm.
 Observe national regulations!
 Subject to changes.

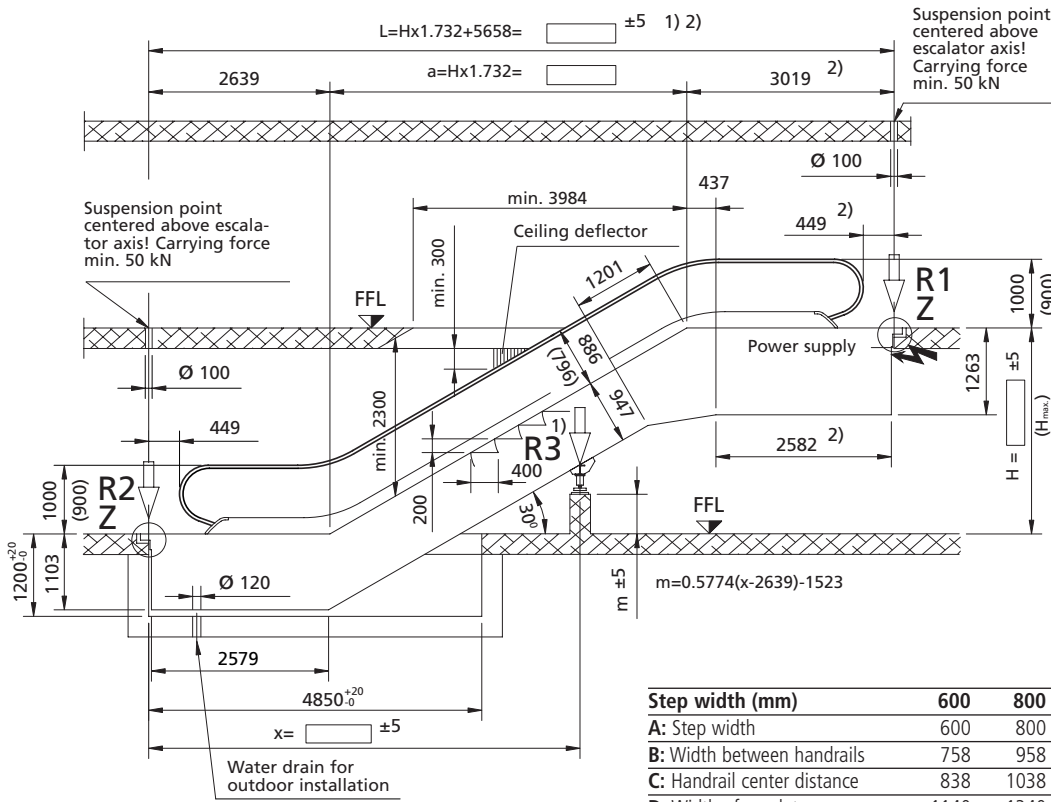

- 1) If $L > L_{max.}$, an intermediate support may be required. Please consult Schindler.
- 2) With a double drive, the truss must be extended by 417 mm.
- 3) With a balustrade height of 900 mm, h is reduced by 70 mm.
- 4) Delivery in min. 2 parts.


Step width (mm)	600	800	1000
A: Step width	600	800	1000
B: Width between handrails	758	958	1158
C: Handrail center distance	838	1038	1238
D: Width of escalator	1140	1340	1540
E: Width of pit	1200	1400	1600
$L_{max.1}$: Limiting span length	19000	17300	15900
$H_{max.}$: Maximum rise	13000	13000	13000

Transportation dimensions

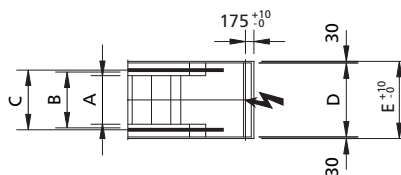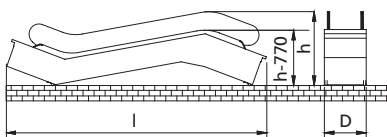

Detail Z

Gaps at joints to be filled with joint filler (by customer)



Inlet for lighting and power circuits centered at upper end, through front face

Step width A mm	Rise H mm	Weight kN	Support loads			Transp. dimensions	
			R1 kN	R2 kN	R3 kN	Balustrade height 1000 h ³⁾	l
800	3500	71	64	54	-	3170	12730
	4000	75	67	58	-	3210	13720
	4500	79	71	62	-	3230	14710
	5000	86	76	67	-	3260	15700
	5500	89	80	70	-	3280	16700
	6000	93	83	74	-	3290	17690
1000	6500	97	87	78	-	3310	18680
	4000	79	76	66	-	3210	13720
	5000	90	86	76	-	3260	15700
	6000	95	48	40	87	3290	17690
	7000	103	51	42	99	3320	19680
	8000	111	54	45	110	4)	4)
	9000	118	56	47	121	4)	4)
	10000	126	59	50	132	4)	4)
11000	143	66	57	146	4)	4)	
12000	157	74	60	158	4)	4)	



Schindler