

Schindler 9300 Advanced Edition


Type 10 • 30°-K • Inclined Balustrade

Rise: max. 8 m at a step width of 1000 mm
Balustrade: design I
Balustrade height: 1000 mm

Inclination: 30°
Step width: 600/800/1000 mm
Step run: 2 horizontal steps



All dimensions in mm.
 Observe national regulations!
 Subject to changes.

1) If $L > L_{max.}$, an intermediate support may be required; please consult Schindler.

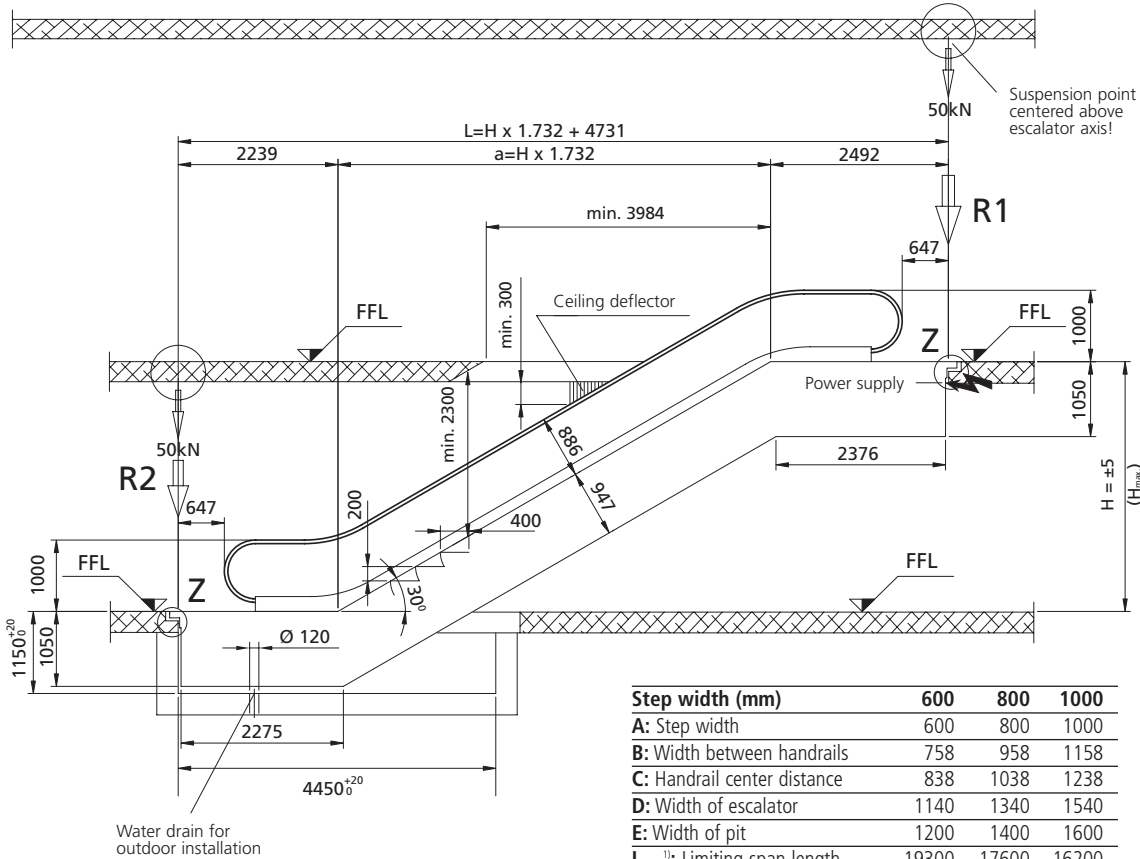


Step width (mm)	600	800	1000
A: Step width	600	800	1000
B: Width between handrails	758	958	1158
C: Handrail center distance	838	1038	1238
D: Width of escalator	1140	1340	1540
E: Width of pit	1200	1400	1600
$L_{max.}^{1)}$: Limiting span length	19300	17600	16200
$H_{max.}$: Maximum rise	12000	10000	8000

Transportation dimensions

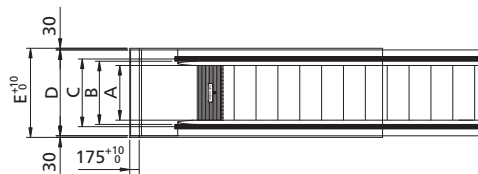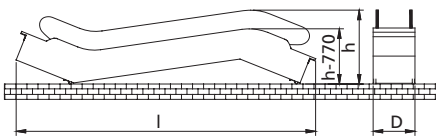

Detail Z

Gaps at joints to be filled with joint filler (by customer)



Inlet for lighting and power circuits centered at upper end, through front face

Step width A mm	Rise H mm	Weight kN	Support loads		P mot kW	Transp. dimensions Balustrade height 1000	
			R1 kN	R2 kN		h	l
600	3000	57	47	40	4	2810	10800
	3500	61	50	43	4	2840	11790
	4000	64	53	46	4	2860	12780
	4500	67	56	49	4	2880	13780
	5000	71	59	52	4	2890	14770
	5500	74	62	55	5.5	2900	15770
800	3000	60	53	47	4	2810	10800
	3500	63	56	50	4	2840	11790
	4000	66	60	53	4	2860	12780
	4500	71	64	57	5.5	2880	13780
	5000	73	67	60	5.5	2890	14770
	5500	78	71	64	5.5	2900	15770
1000	3000	85	76	69	5.5	2910	16760
	3500	89	80	73	7.5	2910	16760
	4000	93	84	77	7.5	2910	16760
	4500	97	88	81	7.5	2910	16760
	5000	101	92	85	7.5	2910	16760
	5500	105	96	89	7.5	2910	16760



Schindler