

# Schindler 9300 Advanced Edition


## Type 10 • 30°-M • Inclined Balustrade

**Rise:** max. 8 m at a step width of 1000 mm  
**Balustrade:** design I  
**Balustrade height:** 1000 mm

**Inclination:** 30°  
**Step width:** 600/800/1000 mm  
**Step run:** 3 horizontal steps



All dimensions in mm.  
 Observe national regulations!  
 Subject to changes.

1) If  $L > L_{max.}$ , an intermediate support may be required; please consult Schindler.

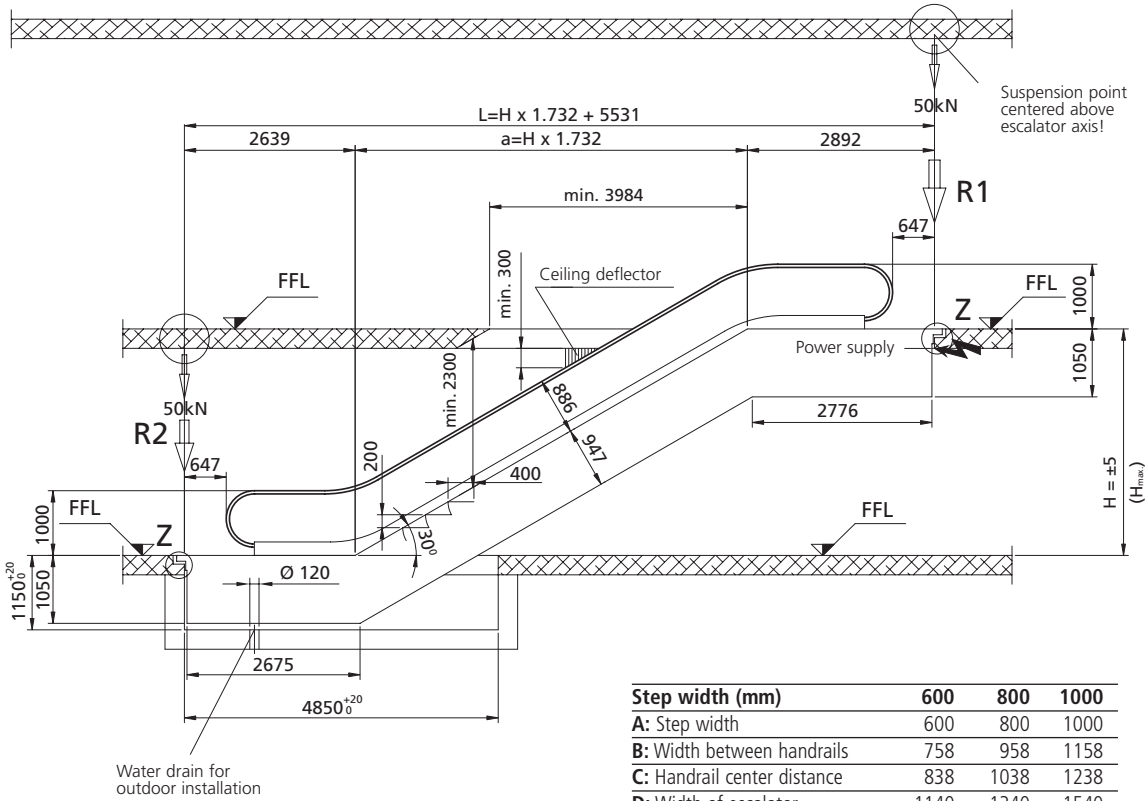


Step width (mm)	600	800	1000
A: Step width	600	800	1000
B: Width between handrails	758	958	1158
C: Handrail center distance	838	1038	1238
D: Width of escalator	1140	1340	1540
E: Width of pit	1200	1400	1600
$L_{max.}^{1)}$ : Limiting span length	19300	17600	16200
$H_{max.}$ : Maximum rise	12000	10000	8000

### Transportation dimensions

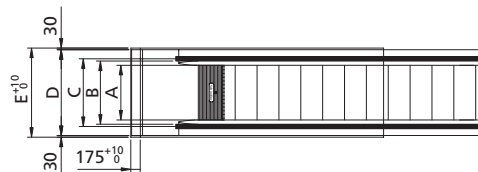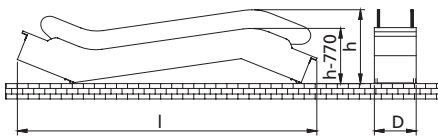

### Detail Z

Gaps at joints to be filled with joint filler (by customer)



Inlet for lighting and power circuits centered at upper end, through front face

Step width	Rise	Weight	Support loads	P mot	Transp. dimensions		
A	H	kN	R1	R2	Balustrade height 1000		
mm	mm		kN	kN	h		
600	3000	61	50	43	4	2930	11550
	3500	64	53	46	4	2960	12530
	4000	68	56	49	4	2990	13520
	4500	71	59	52	4	3010	14510
	5000	74	62	55	4	3030	15500
	5500	78	65	58	5.5	3050	16500
800	3000	64	57	50	4	2930	11550
	3500	68	60	54	4	2960	12530
	4000	71	64	57	4	2990	13520
	4500	75	67	61	5.5	3010	14510
	5000	78	71	64	5.5	3030	15500
	5500	85	76	69	5.5	3050	16500
1000	3000	68	64	58	4	2930	11550
	3500	72	68	62	5.5	2960	12530
	4000	76	72	66	5.5	2990	13520
	4500	82	78	71	5.5	3010	14510
	5000	86	82	75	5.5	3030	15500
	5500	91	86	80	7.5	3050	16500
6000	94	90	84	7.5	3060	17490	



**Schindler**